

Navgrun



Nithin Sai Renewables Pvt Ltd

 www.navgrun.com

 info@navgrun.com




MBB TOPCON N-Type M10

Halfcut-cell

Navgrun

NS144B, 560 - 590/1500 V Series Bi-Facial Glass-Glass

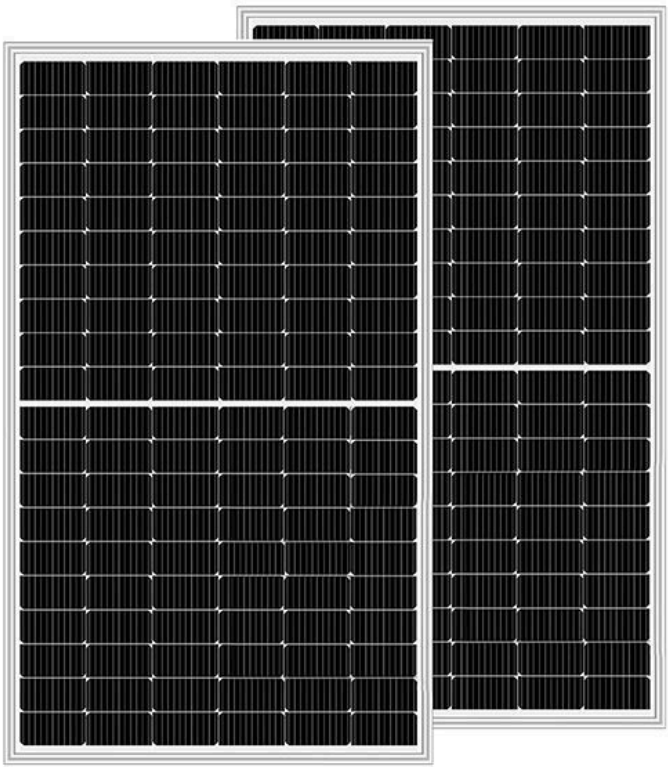

POWER

- Module power from **560 W to 590 W**
- Comprehensive LID/Le TID mitigation technology, up to 50% lower degradation
- Cost effective product for utility power plant
- Less shading effect

RELIABILITY

- Heavy snow load up to 5400 Pa
Heavy load up to 2400 Pa
- Low temperature coefficient



LINEAR PERFORMANCE
WARRANTY



PRODUCT WARRANTY

Advanced Technology Features

Cylindrical Tabbing Wire
Tabbing Wire reduces the shadow on active cells and increases the PV module's generation efficiency.

Higher Power Output
Enhanced module output 5-25% generally, bringing significantly lower LCOE and higher IRR.

Field Reliability
Improved due to multi-contacts in the cell, reducing cell stress.

Minimal Power Loss
Optimized through low Internal Resistance.

Industry Leading
30 Years linear performance warranty.

PID Resistance
Excellent Anti-PID performance guarantee via optimised mass-production process and materials control.

Bypass Diodes
Within split JB enable PV module to perform in partial shadow conditions.

Strong Quality
Check and Quality Assurance with Pre and Post EL tests.

Certifications

IEC 61215:2021, 61730 1-2:2023, 61701 (Sev 6 ed. 3), 62716	BIS IS 14286:2023, IS 61730-1:2016, IS 61730-2:2016 Std
IEC 60068-2-68	CE Certified
IEC TS 62804-1	LeTID
IEC 61853-1	UL 61730:2022
IEC 61853-2	



*Certification in process

TECHNICAL DATA

MBB TOPCON N-Type M10 Halfcut-cell

NS144B, 560 - 590/1500 V Series Bi-Facial Glass-Glass

Navgrun

Electrical Parameters at STC

Model	Series NS 500B 144 Cells MBB							
Module Type	UoM	NS 560B	NS 565B	NS 570B	NS 575B	NS 580B	NS 585B	NS 590B
Maximum Power (Pmax)	Wp	560	565	570	575	580	585	590
Maximum Voltage (Vmpp)	V	43.91	43.95	43.99	44.03	44.07	44.11	44.15
Maximum Current (Impp)	A	12.76	12.86	12.96	13.07	13.17	13.27	13.37
Open Circuit Voltage (Voc)	V	51.18	51.22	51.26	51.30	51.34	51.38	51.42
Short Circuit Current (Isc)	A	13.40	13.50	13.61	13.71	13.83	13.93	14.04
Module Efficiency	%	21.66	21.86	22.05	22.24	22.44	22.63	22.83

STC: Irradiance 1000 W/m², module temperature 25°C, air mass 1.5 g, spectrum according to EN 60904-3.
Power measurement tolerance is within -0 ~± 5Wp. Voc and Isc tolerance ±3%.
Maximum system voltage 1500 V, Maximum Fuse Rating 30A.

Electrical Parameters at NOCT

Model	Series NS 500M 144 MBB Cells							
Module Type	UoM	NS 560B	NS 565B	NS 570B	NS 575B	NS 580B	NS 585B	NS 590B
Maximum Power (Pmax)	Wp	412	416	419	423	427	430	434
Maximum Voltage (Vmpp)	V	40.74	40.78	40.82	40.86	40.89	40.93	41.00
Maximum Current (Impp)	A	10.11	10.19	10.27	10.35	10.43	10.51	10.59
Open Circuit Voltage (Voc)	V	47.82	47.86	47.9	47.93	47.97	48.01	48.61
Short Circuit Current (Isc)	A	10.68	10.76	10.85	10.93	11.02	11.10	11.19
Module Efficiency	%	15.95	16.09	16.23	16.38	16.52	16.66	16.76

NOCT: Irradiance 800 W/m², ambient temperature 20°C, wind speed 1m/s, tolerance ±3%.

Gain		NS 560B	NS 565B	NS 570B	NS 575B	NS 580B	NS 585B	NS 590B
10%	Power (Pmax)	616.0	621.5	627.0	632.5	638.0	643.5	649.0
20%		672.0	678.0	684.0	690.0	696.0	702.0	708.0
30%		728.0	734.0	741.5	747.5	754.0	760.5	767.0

Bifacial gains depend on the power plant design and albedo of the installation site.
Power Bifaciality + Pmax(Rear)/Pmax(Front) are tested under STC.

Mechanical Data

Length x Width x Height	2278 x 1134 x 35 mm, ± 2 mm
Weight	34 kg ± 2 kg
Junction Box	IP68, 3 Split Junction Box with Individual Bypass Diodes
Output Cable	Length: 300 mm / As Per Customer Requirement, Dia: 4 mm ²
Connector	MC4 Compatible
Application Class	Class A (Safety Class II)
Glass Front / Glass Rear	Semi-tempered - High Transmittance ARC Glass 2 mm / High Transmittance Non-ARC Glass 2mm
Solar PV Cells	TOPCON 10BB / 16BB - M10 N Type
Cell Encapsulant	EPE (EVA-POE)
Frame	Anodised (15 µ) Aluminium Frame, Silver
Mechanical Load Test	5400 Pa (Snow Load), 2400 Pa (Wind Load)
Fire Performance	Type 4 (UL 61730) or Class C (IEC 61730)
Country of Origin	India

Operating Conditions


Temperature Coefficient Voc, β	-0.27%/°C
Temperature Coefficient Isc, α	0.04%/°C
Temperature Coefficient Pmax, γ	-0.30%/°C
NOCT	42°C±3°C
Temperature range	-40°C to +85°C

- 30-Year Linear Performance Warranty
- 12-Year Product Warranty

- <1.0% degradation for 1st year
- <0.40% from 2nd year onward to 30th year

Note: The specifications in this data sheet may deviate slightly from our actual products due to the ongoing innovation and product enhancement. We reserve the right to make necessary adjustments to the information described herein at any time without further notice.


Typical I-V Curves

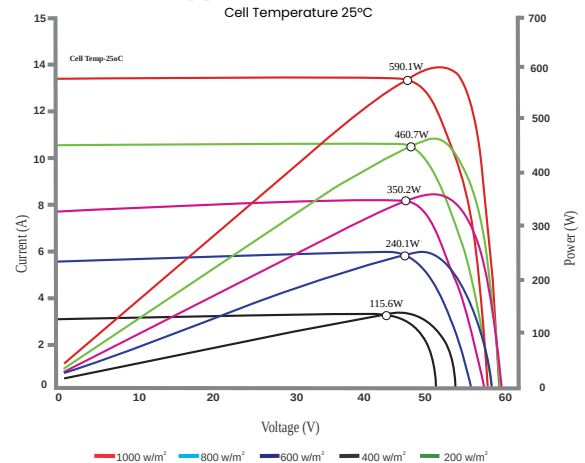

Packaging Information

Container	20'GP	32'HQ	40'HQ
Quantity per Pallet	36	36	36
Pallet/Container	8	16	20
Quantity/Container	288	576	720

Mechanical Diagrams

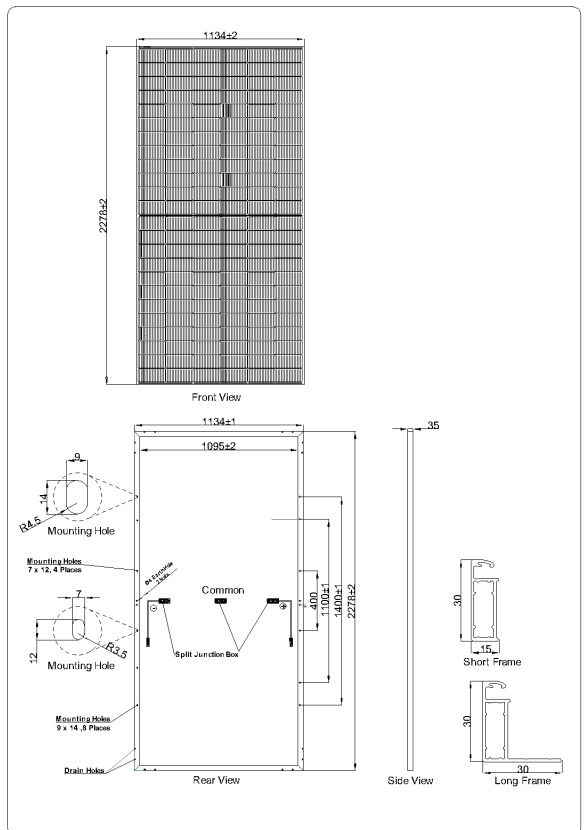

Remark: Customized frame colour and length available upon request

***WARRANTY: Please refer the Warranty Card.**

***CAUTION: Please read safety and installation instructions before using the product.**

Contact Us

Nithin Sai Renewables Pvt Ltd

www.navgrun.com

info@navgrun.com

Corporate Office

Balsa N1, 2nd Floor, Embassy Manyata Business Park, Outer Ring Road, Nagavara, Rachenahalli Village, KR Puram Hobli, Bangalore, India - 560045

Factory

Plot No. 75-A, 2nd Phase, KIADB Industrial Area, Chintamani Taluk, Mastenahalli Industrial Area, Chikkaballapur, Karnataka - 563128