

Navgrun



Nithin Sai Renewables Pvt Ltd

 www.navgrun.com

 info@navgrun.com




MBB TOPCON N-Type G12R

Half Cut Cell

NS600B, 620 - 635/1500 V Series

Bi-Facial Glass-Glass

Navgrun

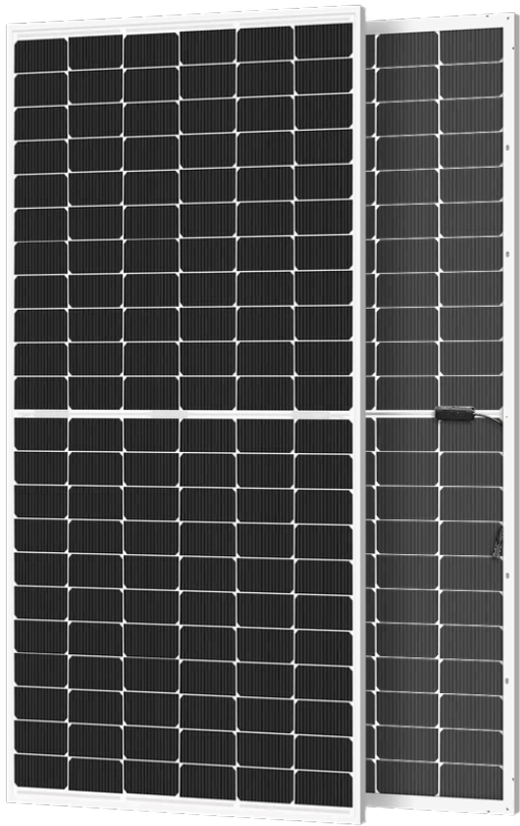

POWER

-  Module power from **620 W to 635 W**
-  Comprehensive LID/Le TID mitigation technology, up to 50% lower degradation
-  Cost effective product for utility power plant
-  Less shading effect

RELIABILITY

-  Heavy snow load up to 5400 Pa
-  Heavy load up to 2400 Pa
-  Low temperature coefficient



LINEAR PERFORMANCE
WARRANTY



PRODUCT WARRANTY

Advanced Technology Features

	Cylindrical Tabbing Wire reduces the shadow on active cells and increases the PV module's generation efficiency.		Higher Power Output Enhanced module output 5-25% generally, bringing significantly lower LCOE and higher IRR.		Field Reliability Improved due to multi-contacts in the cell, reducing cell stress.
	Minimal Power Loss Optimized through low Internal Resistance.		Industry Leading 30 years linear performance warranty.		PID Resistance Excellent Anti-PID performance guarantee via optimised mass-production process and materials control.
	Bypass Diodes Within split JB enable PV module to perform in partial shadow conditions.		Strong Quality Check and Quality Assurance with Pre and Post EL tests.		

Certifications

IEC 61215 2021, 61730 1-2 2016, 61701 (Sev 6 ed. 3), 62716	CE Certified
IEC 60068	LeTID
IEC TS 62804-1	UL 61730 2022
IEC 61853-1 & 2	
BIS IS 14286:2023, IS 61730-1:2016, IS 61730-2:2016	



NS600B, 620 - 635/1500 V Series | Bi-Facial Glass-Glass